


WitJack
1X1 Tab-Down RJ45
RJ-101G03N white

Witmag

TEL: +86 755 36921672 FAX: +86 755 29454863
 Http://www.witmag.com.cn Http://www.witmag.cn
 E-mail:sales@witmag.com.cn

Profile of wave solder

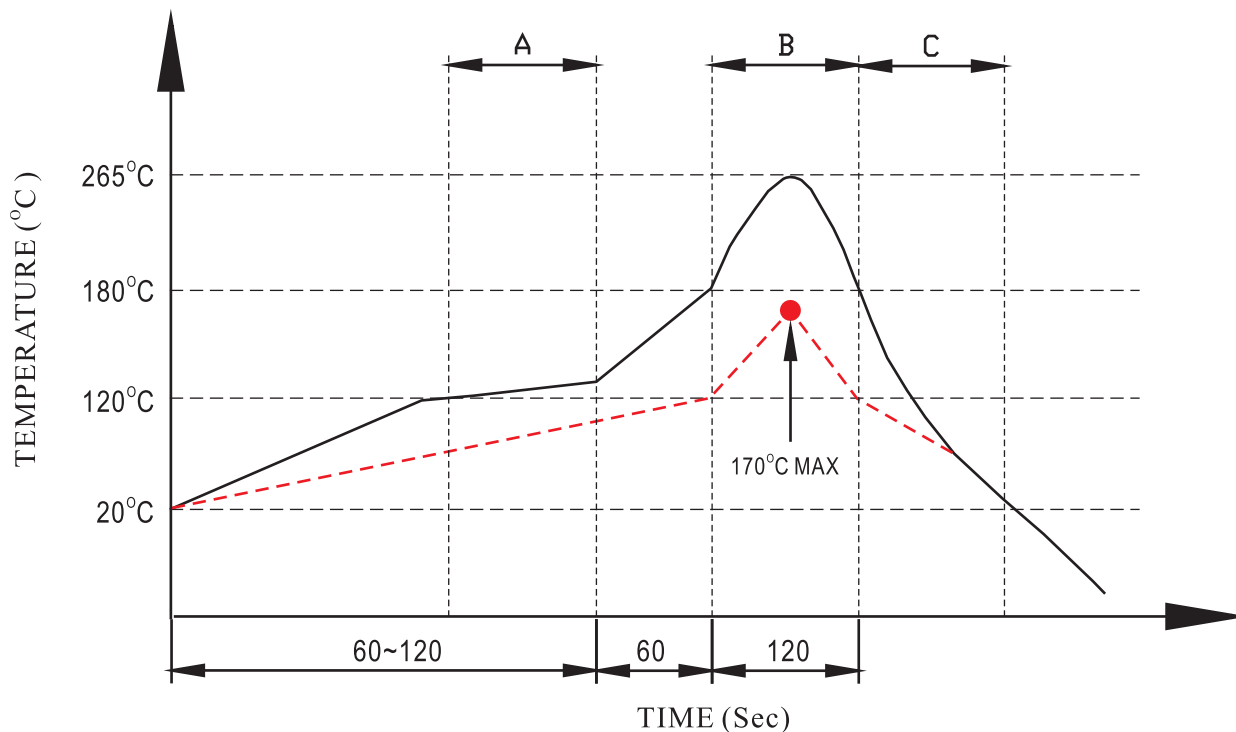

— PIN TEMPERATURE
 - - - COMPONENT TEMPERATURE
 A. Preheating B. Soldering C. Gradual Cooling

SUGGESTED WAVE SOLDER CURVE
 (1) Tip temperature : 265°C max
 (2) Tip temperature time : 3±1sec


*The melting point of Sn99.3/Cu0.7

WitJack 1X1 Tab-Down RJ45 RJ-101G03N white


Witmag

TEL: +86 755 36921672 FAX: +86 755 29454863
Http://www.witmag.com.cn Http://www.witmag.cn
E-mail:sales@witmag.com.cn

Packing

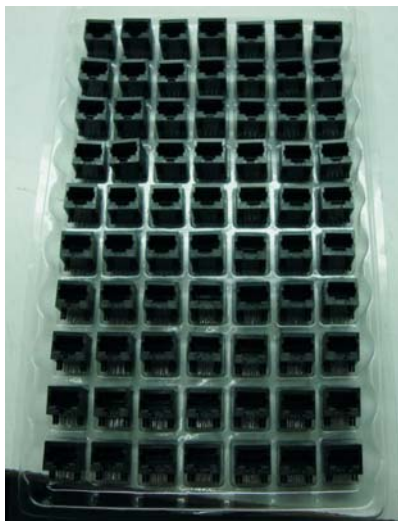

吸塑盘
每盘装产品7*10=70PCS

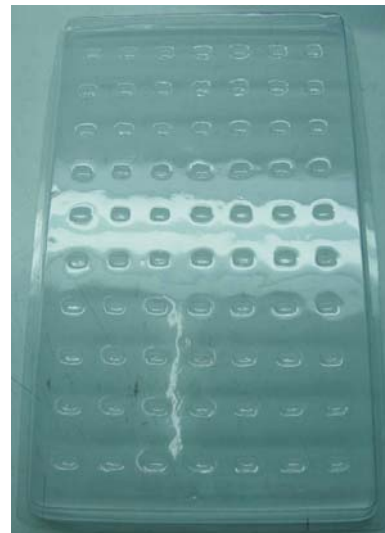

吸塑盖
每盘装好的产品上盖一个吸塑盖



每箱:70*20=1400PCS



每箱右上角贴标签